



COMBiLiFT


Customised Handling Solutions

C3000 GT

making short work of long loads



The C6000 GT can operate outdoor on semi-rough terrain as well as indoors.

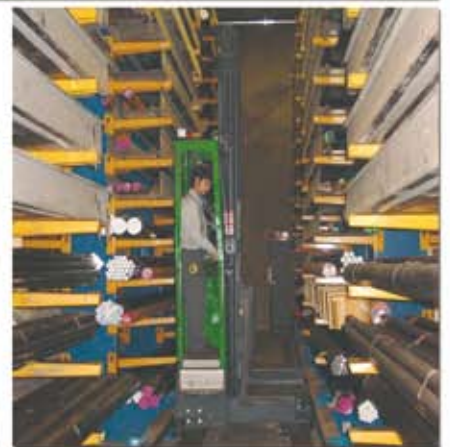

indoor outdoor narrow aisle solutions

www.COMBiLiFT.COM



SPECIFICATIONS


Model C3000 GT

REF	DESCRIPTION	1220mm
1a	Lift Height	6096mm
1b	Free Lift Height	2540mm
2	Height Mast Closed	3886mm
3	Max.(Mast raised)	7493mm
4	Overall Length	1880mm
5	Mast Travel	1270mm
6	Ground Clearance Under Mast	127mm
7	Ground Clearance to Centre of Wheelbase	127mm
8	Height Over Cab (without work-lights)	2896mm
9	Width Across Platforms	2946mm
10	Outside Spread of Fork Arms	1350mm
11	Wheelbase	2299mm
12	Frame Opening	1397mm
13	Load Centre Distance	610mm
14	Overhang Front	150mm
15	Track	1575mm
16	Overhang Back	127mm
17	Length From Face of Fork	660mm
18	Forward Fork Tilt	3°
19	Backward Fork Tilt	4½°
20	Platform Height With Front Lowered	420mm
21	Platform Length	1220mm
A	Capacity	3000kg
B	Unladen Weight	8600kg
C	Maximum Ground Speed	7½ mph
D	Gradability	10%
E	3 Ltr GM LPG	65 hp
F	Electric's	12 Volt
G	Fork Section	50 x 125 x 1220mm
H	350/150-280 Front Tyre (Solid) x 2	350 / 150
I	23 x 10 - 12 Rear Tyre	23"/ 10"
	(Super Elastic) x 2 (OD/Width)	
J	Standard Colour	Green / Grey

FEATURES INCLUDE:

- Rubber Mounted Overhead Guard
- Load Sensing Steering
- Tilting Chassis +/- 1½° At Front
- 4 Wheel Steering
- 2 Wheel Hydrostatic Drive
- Hydraulic Oil Cooler

Distributed By

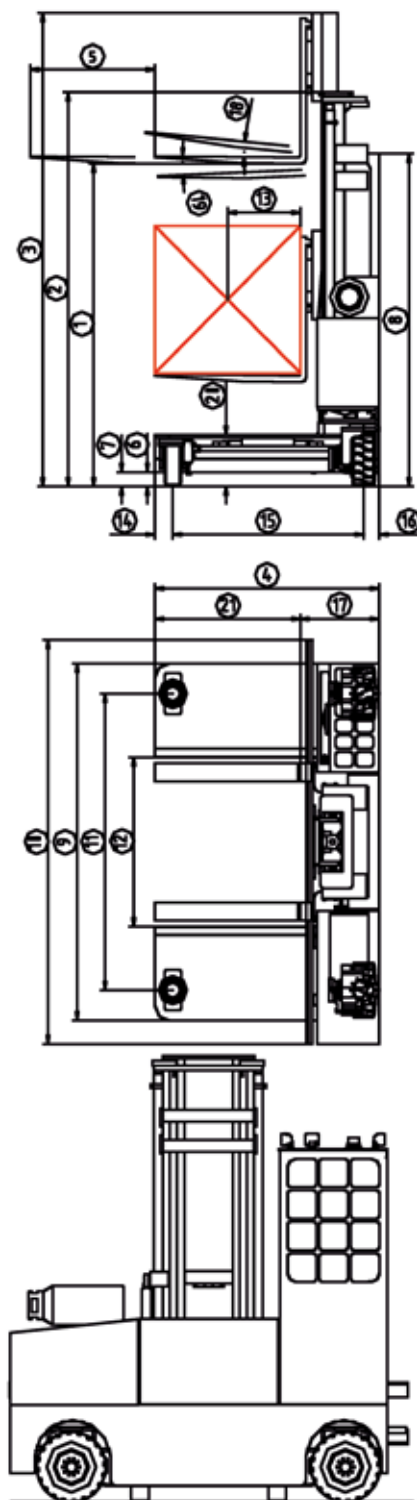

COMBiLiFT Ltd
Co.Monaghan
Ireland
Tel: ++ 353 47 80500
Fax: ++ 353 47 80501
info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

www.COMBiLiFT.com