




COMBiLiFT

Customised Handling Solutions

C5000 SL

making short work of long loads

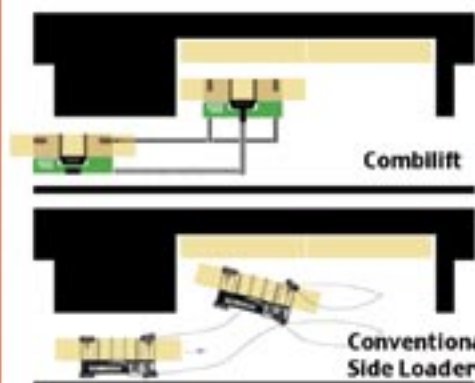

*Carousel
Mode*



two machines in one


> counterbalance forklift > sideloader > aisle truck

www.COMBiLiFT.com



SPECIFICATIONS

Model C5000 SL

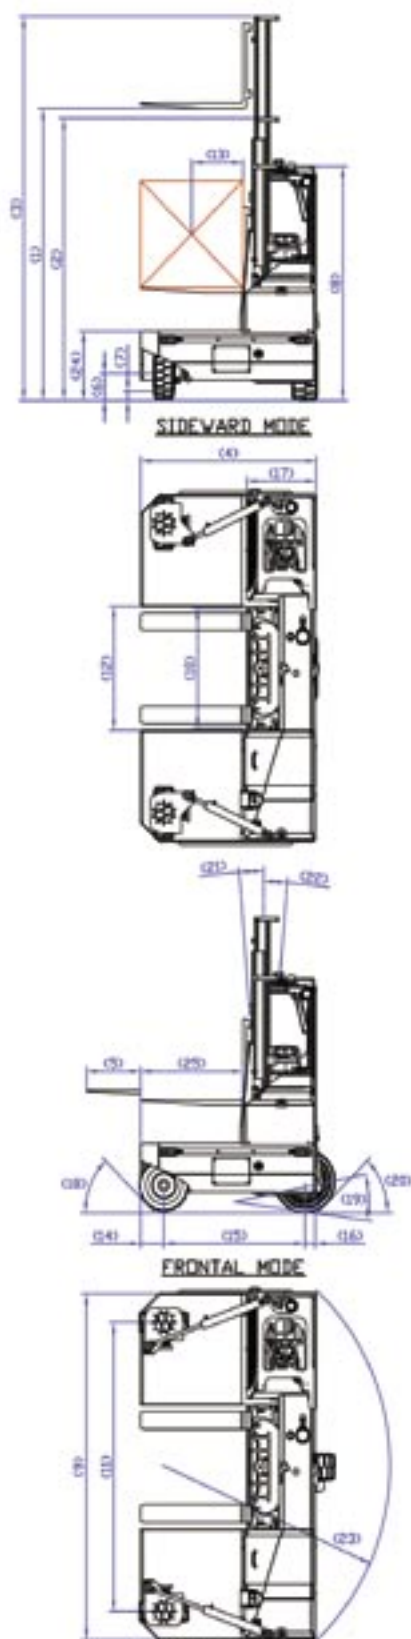

REF	DESCRIPTION	C5000SL
1a	Max. Lift Height	4040mm
1b	Free Lift Height	0mm
2	Height Mast Closed	3000mm
3	Max. (Mast raised)	5200mm
4	Overall Length	2050 / 2250mm
5	Mast Travel	1300 / 1500mm
6	Ground Clearance Under Mast	300mm
7	Ground Clearance to Centre of	185mm
8	Height Over Cab (without work-lights)	2570mm
9	Width	3900mm
10	Outside Spread of Fork Arms	1350mm
11	Track Front	3258mm
12	Frame Opening	1400mm
13	Load Centre Distance	600mm
14	Overhang Front	272mm
15	Wheel Base	1658 / 1858mm
16	Overhang Back	121mm
17	Length From Face of Fork	850mm
18	Approach Angle	45°
19	Ramp Angle	18°
20	Departure Angle	45°
21	Forward Tilt	3°
22	Backward Tilt	5°
23	Minimum Outside Radius	2590mm
24	Platform Height	750mm
25	Platform Length	1200 / 1400mm
A	Capacity	4500kg / 5000Kg
B	Unladen Weight	8500Kg / 8900kg
C	Maximum Ground Speed	20 km/h
D	Gradability	15%
E	V3300 - TE Kubota Diesel	62kW
F	Electric's	12 Volt
G	Fork Section 50 x 200 x	1200 / 1400mm
H	23 x 10 - 12 Front Tyre (Super Elastic)	OD580 / Width 240mm
I	28 x 12.5 - 15 Rear Tyre (Super Elastic)	OD720 / Width 295mm
J	Standard Colour	Green and Grey
K	Suspension Seat	KAB Model 116

FEATURES INCLUDE:

- Rubber Mounted Half Open Cabin
- Multi-Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way lever Positioning of Wheels
- Hydraulic Oil Cooler

Distributed By

www.COMBILIFT.COM

Combilift Ltd., Co. Monaghan, Ireland **Tel:** +353 47 80500 **Fax:** +353 47 80501 **info@combilift.com**

COMBILIFT has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and / or dimensions may vary from those illustrated in some countries.