

# DRAINAGE GRIDS



## Frame

Product of granules of recycled rubber (tires) hot pressing.  
100% ecological and recyclable.



## Grid

The product is from recycled rubber granulate molded under heat and reinforced with iron bars.

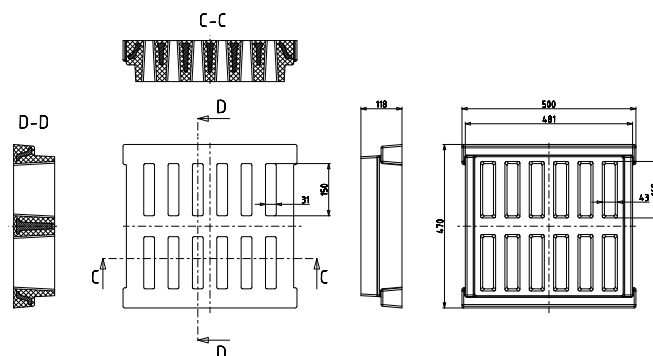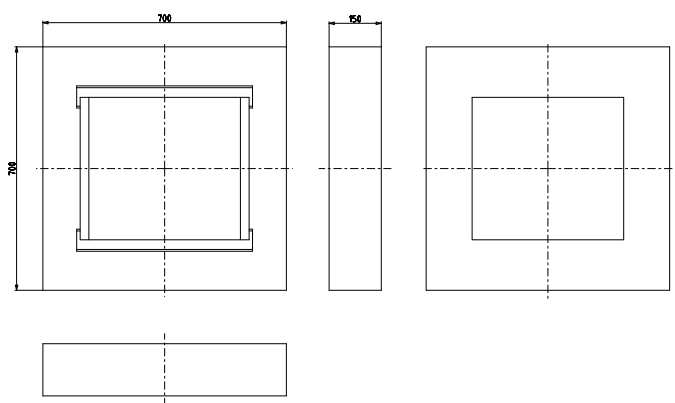

## Technical information

- products meet the conditions according to DIN EN 124 and are included in the group D400 (guaranteed minimum loading 40 tons)
- products are not soaked up water and are not affected by road salt
- very effective damping when driving vehicles - are much quieter
- more thrifty to the ground - significantly reduce erosion, do not form potholes
- frost resistant - resist extreme temperatures from -40 °C to + 90 °C
- product life 5–7 years
- not attractive for collectors of secondary raw materials
- health safe

	frame	grid
dimensions: length / width / height (mm)	700 / 700 / 150	500 / 470 / 118
weight (kg)	53	39
flow rate (%)	-	30
material	rubber	rubber + iron 42 2425